


TEMPERATURE SENSORS FOR B.M.S

■ A range of NTC Thermistor, Ni1000 & PT100/PT1000 sensors for use with most manufacturers BMS equipment.

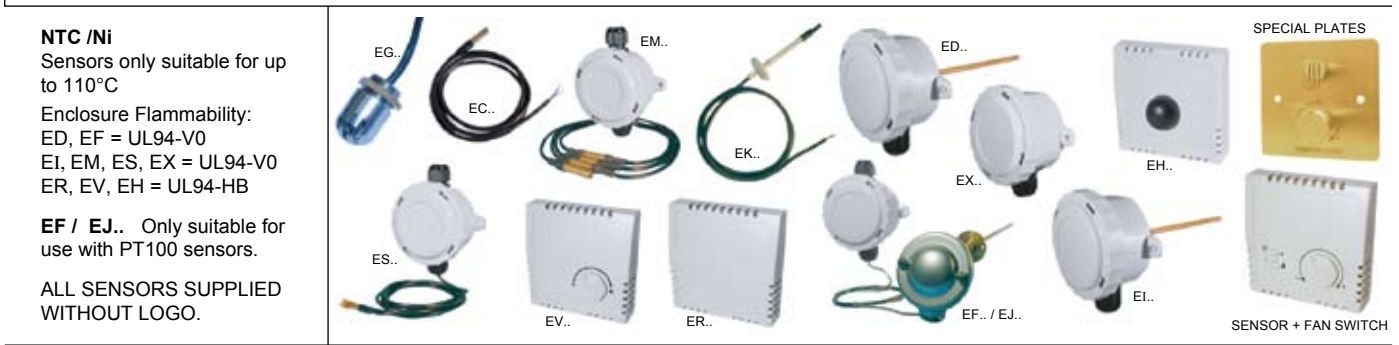


Prefix	Type	Dimensions	Protection	Suffix	Compatibility	Check Temp/Resistance Chart
--------	------	------------	------------	--------	---------------	-----------------------------

EC-	Cable	2m long cable. Sensor 7.1 dia x 40	IP65	3K3A1	Alerton	Ibex
ED-	Duct	80 dia x 55 160mm probe	IP65	20K6A1	Honeywell	Excel
EF-	Flue Gas	Probe length 230mm	IP65	10K3A1	Honeywell	Aquatrol 2000
EH-	Black Bulb	85H x 85W x 30D + bulb 16 mm	IP30		Trend	York MR700,701,702,704,708,710
EI-	Immersion <110°C	Approx 80 dia x 55	IP65		Alerton	Backtalk
EJ-	Immersion >110°C	Approx 80 dia x 55	IP65		Smart	
EI-, EJ- ORDER POCKET SEPARATELY						
EK-	Fan Coil	1m Cable + Duct tube 80mm	IP65	10K3A1/A	Satchwell	DRT,DDT,DWT,DOT,DST,DDU 1803,DC1401
EM-	Duct Averaging	Approx 80 dia x 55 4 sensors at 0.5m intervals along 2m cable x 8 dia	IP65	10K4A1	Andover	
ER-	Room	85H x 85W x 30D	IP30	100K6A1	York	MR703,705,709
EV-	Room + Adj knob	85H x 85W x 30D Pot 1-11kΩ	IP30	30K6A1	Drayton	DC1100 compensator
ES-	Strap-On	Approx 80 dia x 55 cable 2m includes strap for up to 6" pipe dia	IP65	LST1	Landis & Staefa	T1
EX-	Outside	Approx 80 dia x 55	IP65	LS1000	Siemens, Landis	Ni 1000 QAA23, QAD21, QAE21
				TAC1	TAC	
				PT100	Serck etc	PT100
				PT1000	Cylon etc	PT1000
EGS-	Thimble sensor	Dome dia 15 x 16.5 L Drill hole 12 dia. 200mm cable	IP30		- Stainless Brushed Satin	
EGB-	Thimble sensor	Dome dia 15 x 16.5 L Drill hole 12 dia. 200mm cable	IP30		- Brass	Other colours on request
EGW-	Thimble sensor	Dome dia 15 x 16.5 L Drill hole 12 dia. 200mm cable	IP30		- White	

TO ORDER - SELECT PREFIX + SUFFIX ie Room Sensor for Trend System = ER-10K3A1, Andover Duct sensor = ED-10K4A1


ACCESSORIES:

EE-2B	Brass Pocket	1/2" BSP 120mm x 6.2mm id for EI-
EE-STK	Stainless Steel Pocket	1/2" BSP 120mm x 6.2mm id for EI- & EJ
EE-ESS	Fixing strap	for ESS Strap-On Thermostats & Sensors
EG-1000	Thermostat Guard	Internal Dims 133H x 155W x 70D
EG-2000	Thermostat Guard	Internal Dims 102H x 123W x 60D

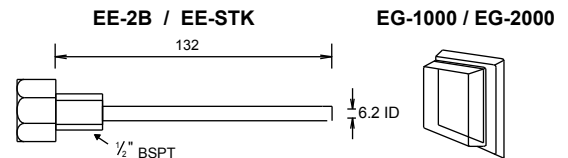


WIRING:


NTC Thermistor




Ni 1000



PT100 / PT1000



EV..



INSTALLATION: Terminals 0.5-2.5mm²
Max length 100m.

Sensor cable size 7/0.2mm
Screened cable is recommended.

Keep away from power cables/units which may cause interference.
The screen should be earthed at the controller end only.