

**TEMPERATURE CONTROLLERS 0-10VDC
PROPORTIONAL 1 - 2 STAGES**

ETC..

<p>These products can monitor the temperature inside buildings, rooms, ducts (return air), tanks, pipes etc and give a 0-10vdc output signal linear across the desired proportional band. Suitable to control damper motors, valve actuators, step controls, relay modules & thyristors etc. The duct unit should be mounted in the return air. If multi-stages of heating and cooling are required, use the ETC. 52 and 2 sets of relay modules ie. 2 x E2RM etc.</p>		<p>NTC thermistor sensor Supply 24VAC/DC ±15% Power consumption 15mA Load >10KΩ Adjustment under the cover Enclosure Flammability ETC-R.. = UL94-HB ETC-D, ETC-I = UL94-V0</p>
--	--	---

Type	Mounting	Range °C	Prop Band °C	Neutral Zone °C	Output Signal	Function	Sensor NTC	Enclosure
ETC-R50	Room	0/+50	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP30
ETC-R52	Room	0/+50	1/10 adj.	1/6 adj.	2x0-10vdc	Htg + Clg	In-built	IP30
ETC-R30V	Room	15/30	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP30
ETC-R32V	Room	15/30	1/10 adj.	1/6 adj.	2x0-10vdc	Htg + Clg	In-built	IP30
ETC-D50	Duct	-10/+50	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP65
ETC-D52	Duct	-10/+50	1/10 adj.	1/6 adj.	2x0-10vdc	Htg + Clg	In-built	IP65
ETC-D95	Duct	25/95	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP65
ETC-I50	Immersion	-10/+50	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP65
ETC-I95	Immersion	25/95	1/10 adj.	-	0-10vdc	Htg or Clg	In-built	IP65


ORDER POCKET SEPARATELY – SEE BELOW

DIMENSIONS:


- ETC-I..** Approx 80dia x 55 Probe length 120mm
- ETC-R..** 85H x 85W x 30D Can be mounted on square or round outlet box
- ETC-D..** Approx 80dia x 55 Probe length 160mm

ACCESSORIES:


- EE-2B** ½" BSP x 120mm Brass pocket for ETC-I..
- EE-STK** ½" BSP x 120mm Stainless Steel pocket for ETC-I..



EXAMPLES:

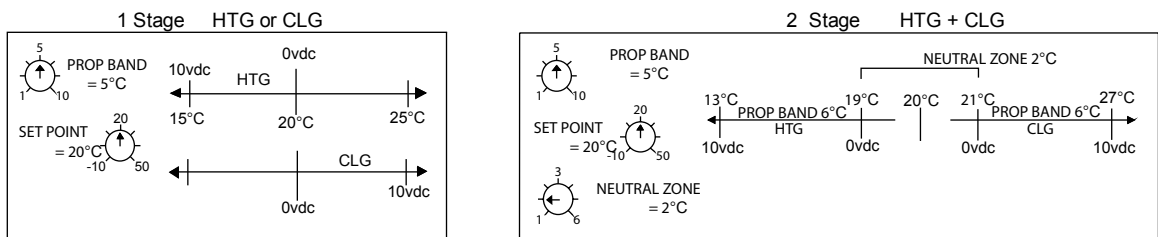

WIRING:



INSTALLATION: Terminals 0.5-2.5mm² Sensor cable size 7/0.2mm Keep away from power cables/units which may cause interference. Max length 100m. Screened cable is recommended. The screen should be earthed at the controller end only.